



tel: 416-291-7371 1-800-565-8401
fax: 416-291-8049 1-888-811-2264

web: www.vibro-acoustics.com
eml: info@vibro-acoustics.com

File No.: DS-ARTR-001
Supersedes: new

Date: 21 Apr 2014
Date: new

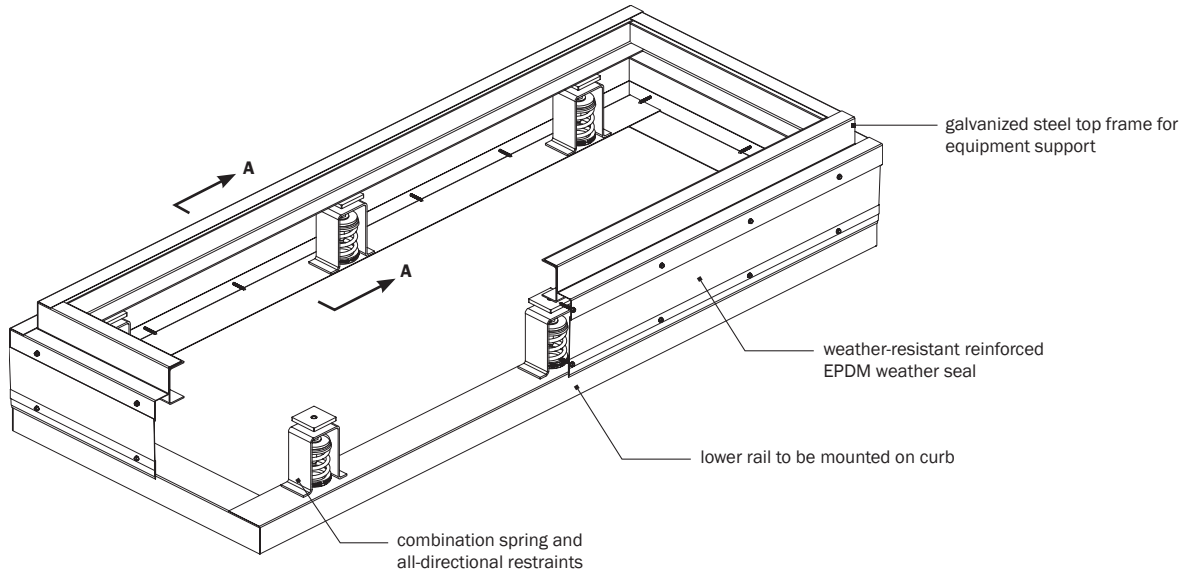

NOTES

- Model ARTR rail is a curb-mounted vibration isolation rail with adjustable integral isolators
- 1" (25 mm) or 2" (50 mm) static deflection springs as specified
- Full perimeter neoprene gasket will be supplied loose for field installation
- Rail is constructed from minimum 4" (102 mm) high gauge G90 galvanized steel top channel
- Special top arrangement with a counter-flashing available for rooftop units that do not have a perimeter base with an overhang

OPTIONS

- Duct supports
- Flexible duct supports
- Knock-down construction for field assembly
- Solid top cover
- Isolators for pedestal mounting
- Seismic and/or wind: include calculations stamped by a PE
- Noise control: 2" (50 mm) acoustical barrier framing

Project:	TAG:		UNIT:	
Customer:	DWN:	CHK:	REV:	DATE:
Consultant:	COMMENTS:			
V-A Project No.:				
V-A Project Manager:				