


Model shown with cut-away

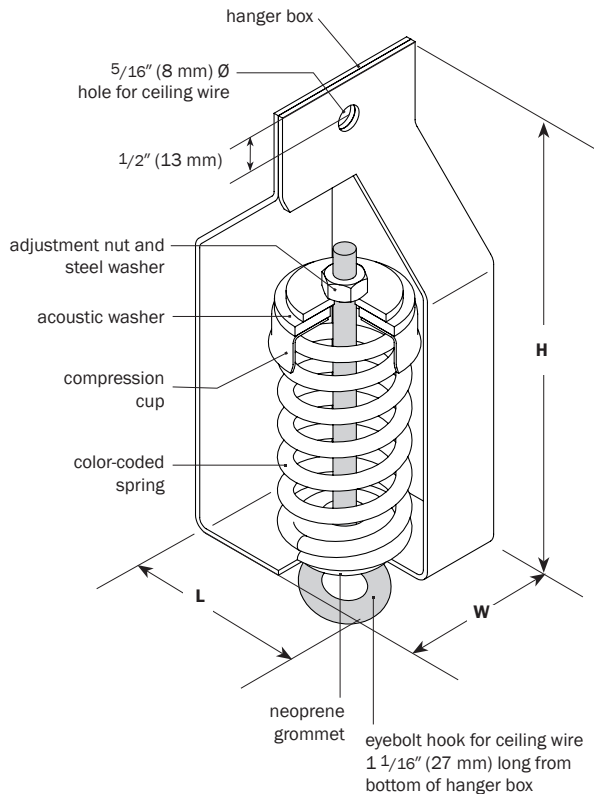

PERFORMANCE

Model	Spring Color	Rated Load		Deflection at rated load		Isolator Weight †	
		lb	kN	in	mm	lb	kg
SHCH-SN-15	White	15	0.07	1.0	25	0.9	0.4
SHCH-SN-30	Yellow	30	0.13	1.0	25	0.9	0.4
SHCH-SN-45	Orange	45	0.20	1.0	25	1.0	0.4
SHCH-SN-60	Red	60	0.27	1.0	25	1.0	0.4
SHCH-SN-100	Blue	100	0.44	1.0	25	1.0	0.5
SHCH-SN-150	Black	150	0.67	1.0	25	1.0	0.5

† weights are approximate

DIMENSIONS

Model	L	W	H
SHCH-SN	in mm	in mm	in mm
15-150	2 1/2 64	2 51	6 152

NOTES

- Spring hanger with steel spring and welded steel housing
- Minimum 50% additional travel to solid
- Springs are powder coated, housings and compression cups are galvanized
- All hardware zinc plated, Grade 2 minimum
- Neoprene grommet in bottom hole prevents eyebolt hook from touching hanger box

Project:			1:		6:	
Customer:			2:		7:	
Consultant:			3:		8:	
Dwg No.:	Rev:	Drawn by:	4:		9:	
V-A Project Manager:			5:		10:	
TAG:			EQUIPMENT:			
COMMENTS:			QTY of sets required:			
			DATE:			