VIBRO-ACOUSTICS®
A Swegon Group company
MEMBER VISCMA

tel: 416-291-7371 1-800-565-8401
fax: 416-291-8049 1-888-811-2264
web: www.vibro-acoustics.com
eml: info@vibro-acoustics.com

1″ (25 mm) / 2″ (50 mm) Deflection ARTR Adjustable Rooftop Isolation Rail

ARTR

File No.: DS-ARTR-001	Date: 21 Apr 2014
Supersedes: new	Date: new

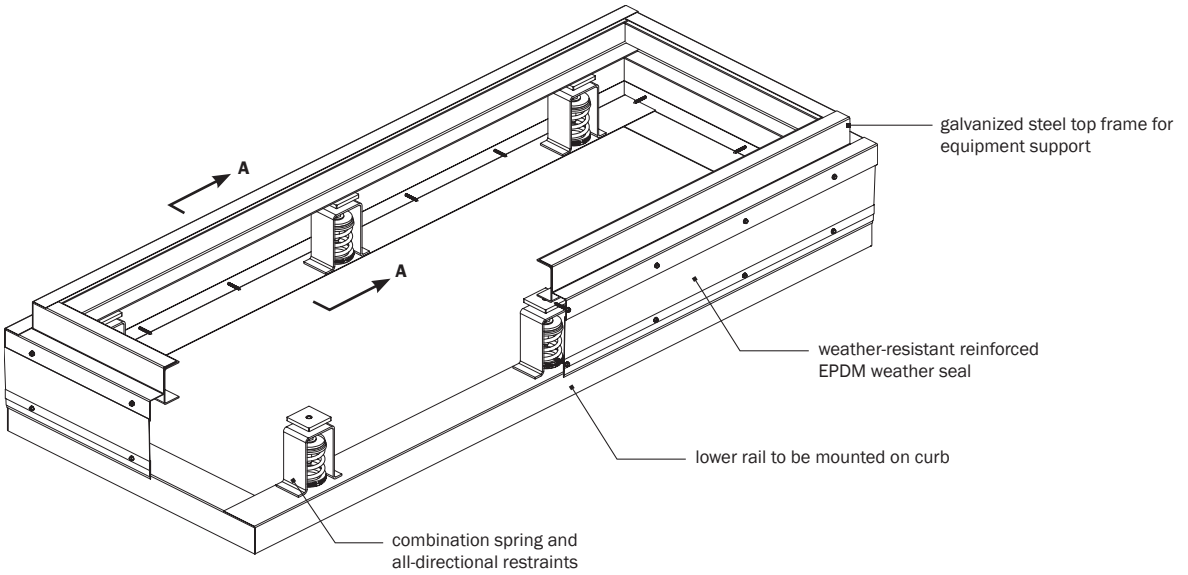

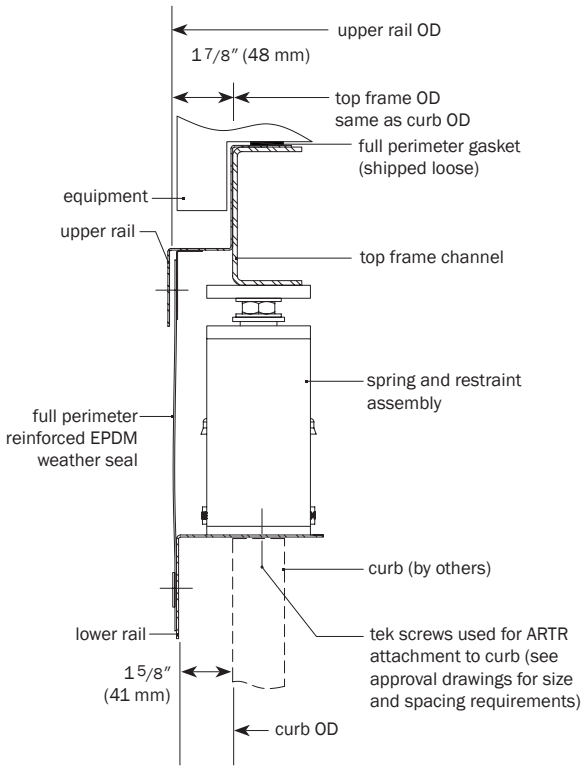

NOTES

- Model ARTR rail is a curb-mounted vibration isolation rail with adjustable integral isolators
- 1″ (25 mm) or 2″ (50 mm) static deflection springs as specified
- Full perimeter neoprene gasket will be supplied loose for field installation
- Rail is constructed from minimum 4″ (102 mm) high gauge G90 galvanized steel top channel
- Special top arrangement with a counter-flashing available for rooftop units that do not have a perimeter base with an overhang

OPTIONS

- ☐ Duct supports
- ☐ Flexible duct supports
- ☐ Knock-down construction for field assembly
- ☐ Solid top cover
- ☐ Isolators for pedestal mounting
- ☐ Seismic and/or wind: include calculations stamped by a PE
- ☐ Noise control: 2″ (50 mm) acoustical barrier framing

Project:	TAG:		UNIT:	
Customer:	DWN:	CHK:	REV:	DATE:
Consultant:	COMMENTS:			
V-A Project No.:				
V-A Project Manager:				

This datasheet is not intended for final submittal purposes