


tel: 416-291-7371 1-800-565-8401
fax: 416-291-8049 1-888-811-2264

web: www.vibro-acoustics.com
eml: info@vibro-acoustics.com

File No.: DS-SHR3-008 Date: 07 Nov 20120
Supersedes: DS-SHR3-007 Date: 06 May 2016

Model shown with cut-away

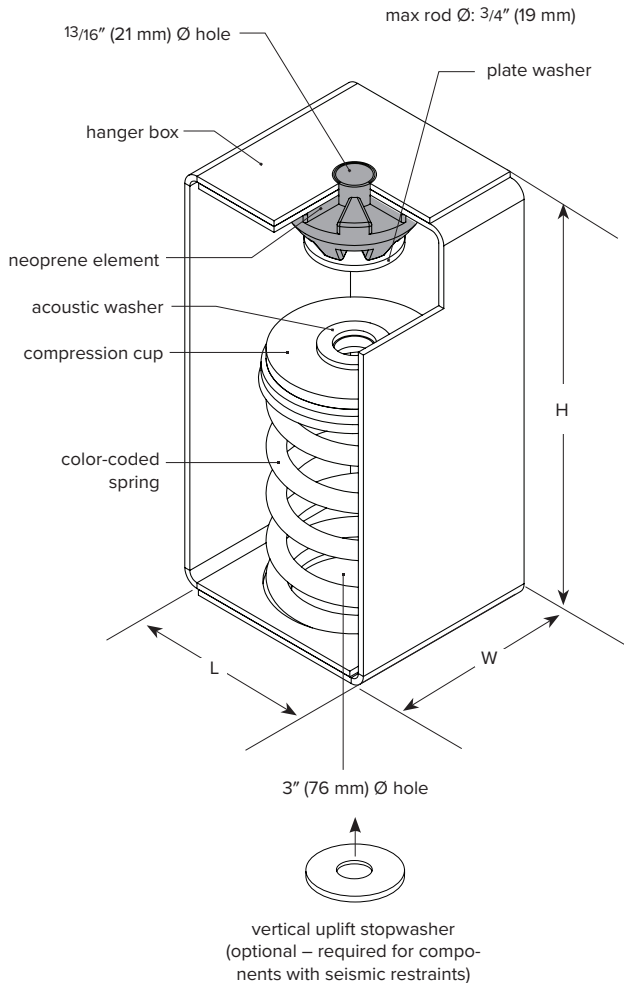

PERFORMANCE

Model	Spring Color	Element Color	Rated Load		Deflection at rated load		Isolator Weight †	
			lb	kN	in	mm	lb	kg
SHR-3N-100	White	Green	100	0.44	3.0	76	10.8	4.9
SHR-3N-200	Yellow	Green	200	0.89	3.0	76	11.0	5.0
SHR-3N-400	Red	Red	400	1.78	3.0	76	11.3	5.1
SHR-3N-700	Blue	Blue	700	3.11	3.0	76	11.8	5.3

† weights are approximate

DIMENSIONS

Model	L	W	H
SHR-3N	in	mm	in
100-700	5 1/2	140	12 1/2

NOTES

- Spring hanger with steel spring and welded steel housing
- Hanger is designed to allow support rod misalignment through a 30-degree arc without contacting the hanger box
- Vertical uplift stopwasher must be added on spring hangers for seismically restrained equipment, duct or piping
- Minimum 50% additional travel to solid
- Springs are powder coated
- Compression cups are powder coated or zinc plated
- Housings are powder coated or galvanized

Project:			plan view of hanger locations		1:	6:
Customer:					2:	7:
Consultant:			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		3:	8:
Dwg No.:	Rev.:	Drawn by:			4:	9:
V-A Project Manager:					5:	10:
TAG:					QTY of sets required:	
COMMENTS:			EQUIPMENT:			
					DATE:	