


SHRP 1SS

shown with cut-away

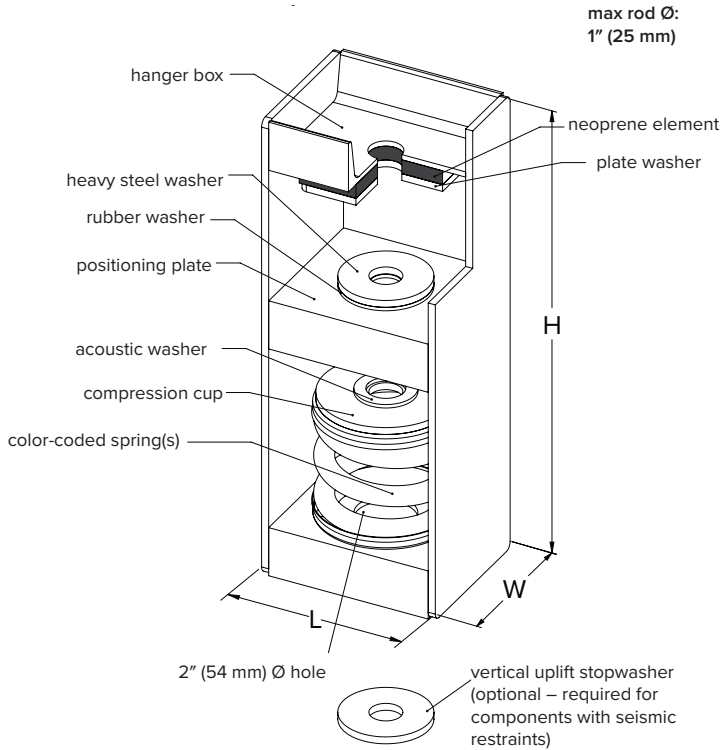

1" (25 mm) Deflection SHRP Pre-Positioning Spring Hangers with Neoprene

SHRP-1SS

File No.: DS-SHRP-1SS-01

Date: September 2025

Supersedes:

Date:

PERFORMANCE

Model	Spring Color outer-inner	Element Color	Rated Load		Deflection at rated load		Isolator Weight †	
			lb	kN	in	mm	lb	kg
SHRP-1SS-2000	Red-Yellow	Black	2000	8.90	1.0	25	26.1	11.8
SHRP-1SS-2300	Red-Blue	Black	2300	10.23	1.0	25	26.4	11.9
SHRP-1SS-2500	Red-Ivory	Black	2500	11.12	1.0	25	26.5	12.0
SHRP-1SS-3000	Black-Yellow	Black	3000	13.35	1.0	25	26.8	12.1
SHRP-1SS-3500	Black-Ivory	Black	3500	15.57	1.0	25	27.2	12.3

† weights are approximate

DIMENSIONS: SHRP-1SS

Model	L		W		H	
	in	mm	in	mm	in	mm
2000-3500	6 1/8	155.6	5	127	16 1/2	419.1

NOTES

- Spring hanger with steel spring and neoprene element in series in a welded steel housing
- Vertical uplift stopwasher must be added on spring hangers for seismically restrained equipment, duct or piping
- 50% additional travel to solid
- Springs are powder coated. Hanger boxes are painted. Hardware is zinc plated.

Project:			plan view of hanger locations 		1:	6:
Customer:					2:	7:
Consultant:					3:	8:
Dwg No.:	Rev.:	Drawn by:			4:	9:
V-A Project Manager:					5:	10:
TAG:			EQUIPMENT:			
COMMENTS:			QTY of sets required:			
			DATE:			