


SHR 1SS

shown with cut-away

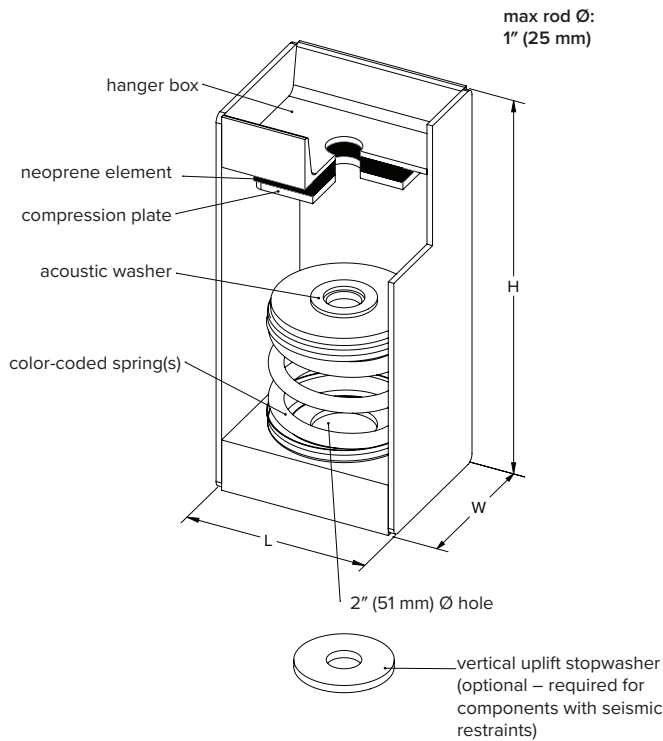

PERFORMANCE

Model	Spring Color outer - inner	Rated Load		Deflection at rated load		Isolator Weight †	
		lb	kN	in	mm	lb	kg
SHR-1SS-2000	Red-Yellow	2000	8.90	1.0	25	22.1	10.0
SHR-1SS-2300	Red-Blue	2300	10.23	1.0	25	22.1	10.0
SHR-1SS-2500	Red-Ivory	2500	11.12	1.0	25	23.9	10.9
SHR-1SS-3000	Black-Yellow	3000	13.35	1.0	25	24.5	11.1
SHR-1SS-3500	Black-Ivory	3500	15.57	1.0	25	24.7	11.2

† weights are approximate

DIMENSIONS

Model	L		W		H	
	in	mm	in	mm	in	mm
2000–3500	6	152	5	127	13	330

NOTES

- Spring hanger with steel spring and neoprene element in a welded steel housing
- Vertical uplift stopwasher must be added on spring hangers for seismically restrained equipment, duct or piping
- 50% additional travel to solid
- Springs are powder coated. Hanger boxes are painted.
- Hardware is zinc plated.

Project:			plan view of hanger locations 		1:	6:
Customer:					2:	7:
Consultant:					3:	8:
Dwg No.:	Rev.:	Drawn by:			4:	9:
V-A Project Manager:					5:	10:
TAG:			EQUIPMENT:			
COMMENTS:			QTY of sets required:			
			DATE:			