


SHR 2SS

shown with cut-away

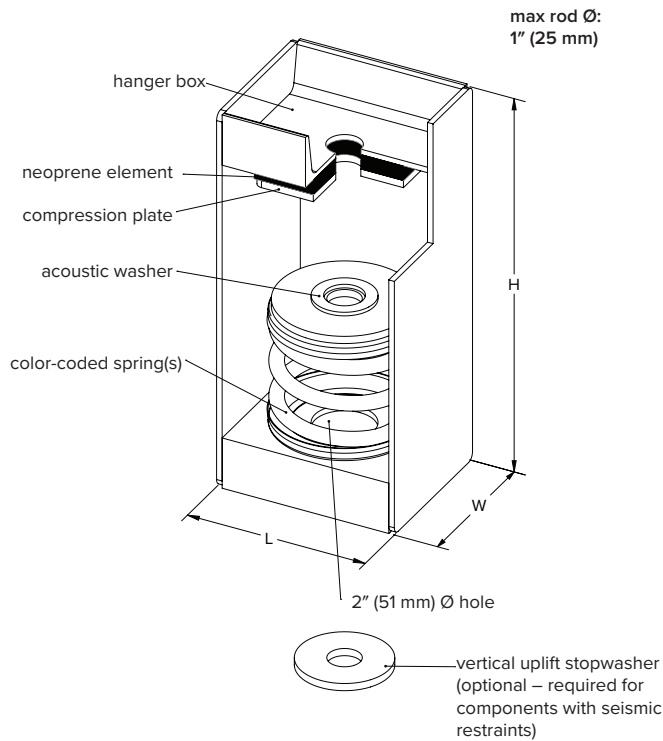

PERFORMANCE

Model	Spring Color outer - inner	Rated Load		Deflection at rated load		Isolator Weight †	
		lb	kN	in	mm	lb	kg
SHR-2SS-2100	Black-White	2100	9.35	2.0	51	22.5	10.2
SHR-2SS-2300	Black-Green	2300	10.23	2.0	51	22.5	10.2
SHR-2SS-2500	Black-Yellow	2500	11.12	2.0	51	24.3	11.0
SHR-2SS-3000	Black-Ivory	3000	13.35	2.0	51	24.9	11.3
SHR-2SS-3500	Black-Orange	3500	15.57	2.0	51	25.1	11.4

† weights are approximate

DIMENSIONS

Model	L		W		H	
	in	mm	in	mm	in	mm
2100–3500	6 5/8	168.3	5	127	14 1/2	368.3

NOTES

- Spring hanger with steel spring and neoprene element in a welded steel housing
- Vertical uplift stopwasher must be added on spring hangers for seismically restrained equipment, duct or piping
- 50% additional travel to solid
- Springs are powder coated. Hanger boxes are painted.
- Hardware is zinc plated.

Project:			plan view of hanger locations 		1:	6:
Customer:					2:	7:
Consultant:					3:	8:
Dwg No.:	Rev.:	Drawn by:			4:	9:
V-A Project Manager:					5:	10:
TAG:			EQUIPMENT:			
COMMENTS:			QTY of sets required:			
			DATE:			